
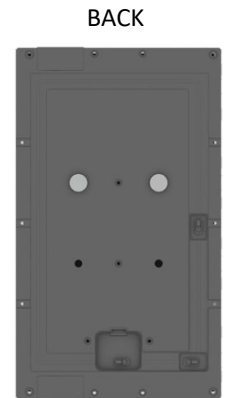


Specifications

Videri V2

GENERAL	
Description	Indoor Canvas
DISPLAY	
Active Display Area	230.04mm x 408.96mm [9.06in x 16.10in]
Resolution	1920 x 1080
Brightness	430 NITS
Surface Treatment	5% Haze
Color Gamut	72% NTSC
TECHNOLOGY	
Processor	DPC430 – 16GB onboard storage
Wi-Fi	802.11 g/n/ac @ 2.4/5GHz
Bluetooth	BT 4.0
NFC	Yes (@13.56MHz)
POWER	
Input	100-240 VAC
Consumption (typ)	25W
ENVIRONMENT	
Operating Temp.	0C to 40C
Operating Humidity	0-90% RH (non-condensing)
CERTIFICATION & COMPLIANCE	
Safety	UL, CSA, CB
EMI/EMC	FCC Class B, IC, CE
SIZING	
Bezel Width	13mm (0.51in)
Thickness	16mm (0.6in)
Weight	2.9kg (6.40lbs)

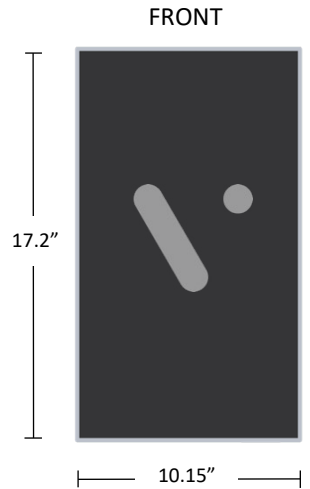

In the box:



Wall Cleat



Videri Cable



Mounting Hardware





Power Adaptor 90W



Specifications

Videri VQ

GENERAL	
Description	Indoor Canvas
DISPLAY	
Active Display Area	475.8mm x 475.8mm [18.73in x 18.73in]
Resolution	1920 x 1920
Brightness	450 NITS
Surface Treatment	25% Haze
Color Gamut	92% NTSC
TECHNOLOGY	
Processor	DPC430 – 16GB onboard storage
Wi-Fi	802.11 g/n/ac @ 2.4/5GHz
Bluetooth	BT 4.0
NFC	Yes (@13.56MHz)
POWER	
Input	100-240 VAC
Consumption (typ)	52W
ENVIRONMENT	
Operating Temp.	0C to 40C
Operating Humidity	0-90% RH (non-condensing)
CERTIFICATION & COMPLIANCE	
Safety	UL, CSA, CB
EMI/EMC	FCC Class B, IC, CE
SIZING	
Bezel Width	11.1mm (0.44in)
Thickness	14.0mm (0.55in)
Weight	4.4kg (9.8lbs)

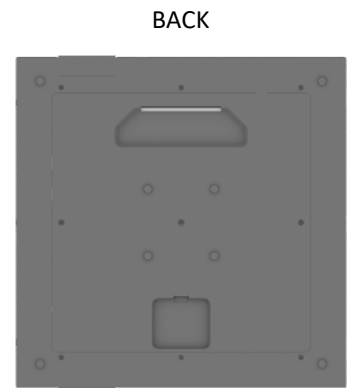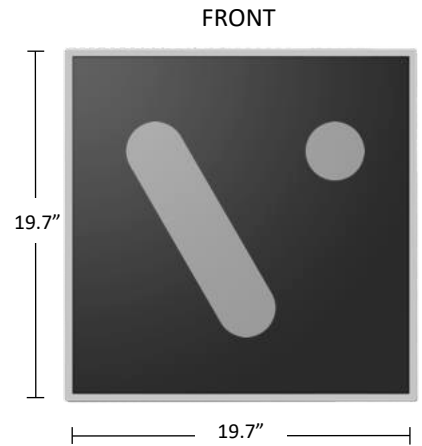

In the box:



Wall Cleat



Videri Cable



Mounting Hardware




Power Adaptor 90W




Specifications

Videri Spark3

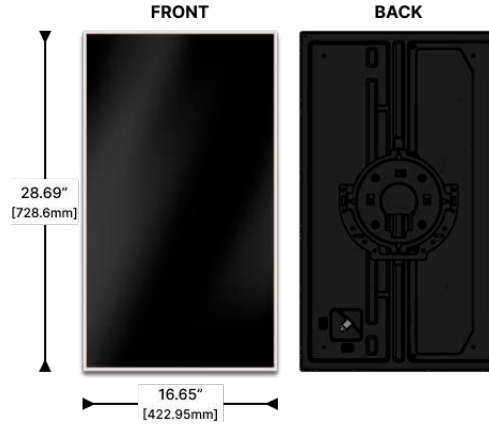

Canvas series	Spark3
Active display area	698.4 x 392.85mm
Resolution	1920 x 1080 FHD
Brightness (NITS)	450 nits
Surface Treatment	25% Haze
Processor	RK3588
OS	Android 12
WiFi/Bluetooth	WiFi 6/5.2
Vesa Pattern	100mmx100mm with M5 screws
Power Consumption	36W (typical), 0.8W (standby)
Panel Type	TFT
Storage	24GB useable
Weight	5.5Kg/13lbs

Power & Mount

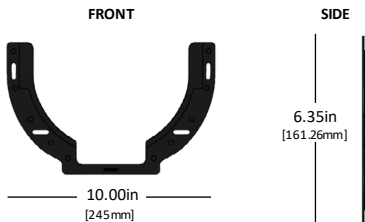

Mount Type	Horseshoe Mount
Mech Outline:	245mm x 161.26mm x 5 mm
Mounting Hardware	#8 Panhead x 1"

Power Supply	
Output Wattage	120 Watts
Output Voltage	24 Volts
DC Side Cable Length(in)	14"
AC Side Cable Length(in)	36"
Mech Outline:	5.5" LX 2.75" W X 1.125" H



Power Cable	
Output Wattage	120 Watts
Output Voltage	24 Volts
Cable Length(ft)	10'



Specifications

Videri V4

GENERAL	
Description	Indoor Canvas
DISPLAY	
Active Display Area	480.33mm x 853.92mm [18.91in x 33.63in]
Resolution	1920 x 1080
Brightness	450 NITS
Surface Treatment	2% Haze
Color Gamut	72% NTSC
TECHNOLOGY	
Processor	DPC430 – 16GB onboard storage
Wi-Fi	802.11 g/n/ac @ 2.4/5GHz
Bluetooth	BT 4.0
NFC	Yes (@13.56MHz)
POWER	
Input	100-240 VAC
Consumption (typ)	80W
ENVIRONMENT	
Operating Temp.	0C to 40C
Operating Humidity	0-90% RH (non-condensing)
CERTIFICATION & COMPLIANCE	
Safety	UL, CSA, CB
EMI/EMC	FCC Class B,CE
SIZING	
Bezel Width	9.2mm (0.36in)
Thickness	12.7mm (0.5in)
Weight	9.0kg (19.9lbs)

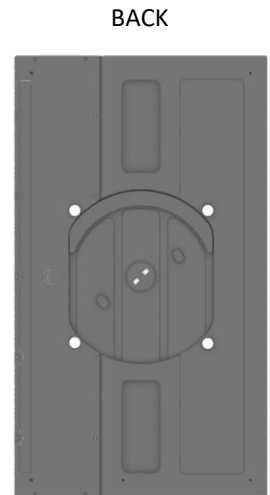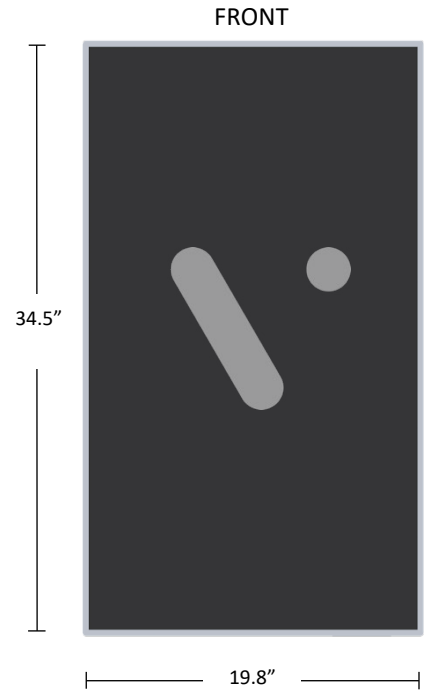

In the box:



Wall Cleat



Mounting Hardware




Power Adaptor 120W




Specifications

Videri Spark4

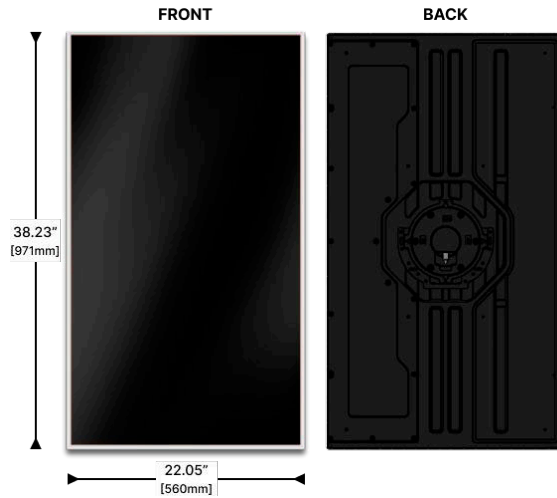

Canvas series	Spark4
Active display area	941.18 X 529.42MM
Resolution	3840 x 2160 UHD
Brightness (NITS)	450 nits
Surface Treatment	25% Haze
Processor	RK3588
OS	Android 12
WiFi/Bluetooth	WiFi6/5.2
Vesa Pattern	200mmX400mm with M5 screws
Power Consumption	63W (typical), 0.8W (standby)
Panel Type	TFT
Storage	24GB useable
Weight	9.5Kg/21lbs

Power & Mount

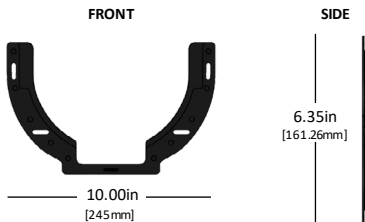

Mount Type	Horseshoe Mount
Mech Outline:	245mm x 161.26mm x 5 mm
Mounting Hardware	#8 Panhead x 1"


Power Supply	
Output Wattage	120 Watts
Output Voltage	24 Volts
DC Side Cable Length(in)	14"
AC Side Cable Length(in)	36"
Mech Outline:	5.5" LX 2.75" WX 1.125" H

Power Cable	
Output Wattage	120 Watts
Output Voltage	24 Volts
Cable Length(ft)	10'




Specifications

Videri Spark5

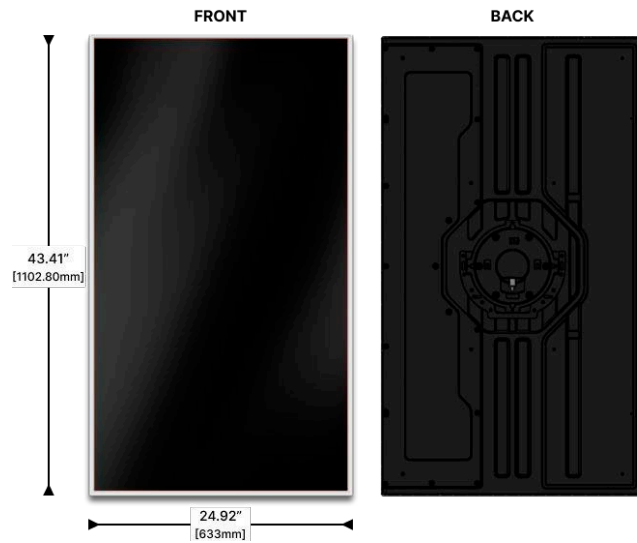

Canvas series	Spark5
Active display area	1073.8 x 604mm
Resolution	3840 x 2160 UHD
Brightness (NITS)	450 nits
Surface Treatment	25% Haze
Processor	RK3588
OS	Android 12
WiFi/Bluetooth	WiFi 6/5.2
Vesa Pattern	200mmx400mm with M5 screws
Power Consumption	81W (typical), 0.4W (standby)
Panel Type	TFT
Storage	24GB Useable
Weight	13Kg/29lbs

Power & Mount

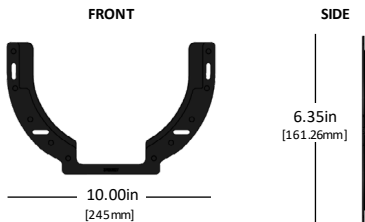

Mount Type	Horseshoe Mount
Mech Outline:	245mm x 161.26mm x 5 mm
Mounting Hardware	#8 Panhead x 1"

Power Supply	
Output Wattage	120 Watts
Output Voltage	24 Volts
DC Side Cable Length(in)	14"
AC Side Cable Length(in)	36"
Mech Outline:	5.5" LX 2.75" WX 1.125" H

Power Cable	
Output Wattage	120 Watts
Output Voltage	24 Volts
Cable Length(ft)	10'

